


WOOD GLOW

Water-Based, Cleaner/Degreaser And Prep For Wood Floors

Wood Glow is a safe, versatile cleaner that effectively removes food & protein-based soils, grease, body oils, scuffs, and black heel marks from sealed wood surfaces without dulling the gloss. Various solutions with different dilutions are possible with Wood Glow use as a pre-finish treatment during the finishing or re-coating process, use as part of a scheduled maintenance program, or as a spot cleaner. Wood Glow quickly evaporates and will not dull, haze or streak the floor, and no rinse is required. Ideal for use on commercial wood floors in restaurants, dining areas, retail stores, sports facilities and other areas where heavy soil loads make maintenance a challenge.

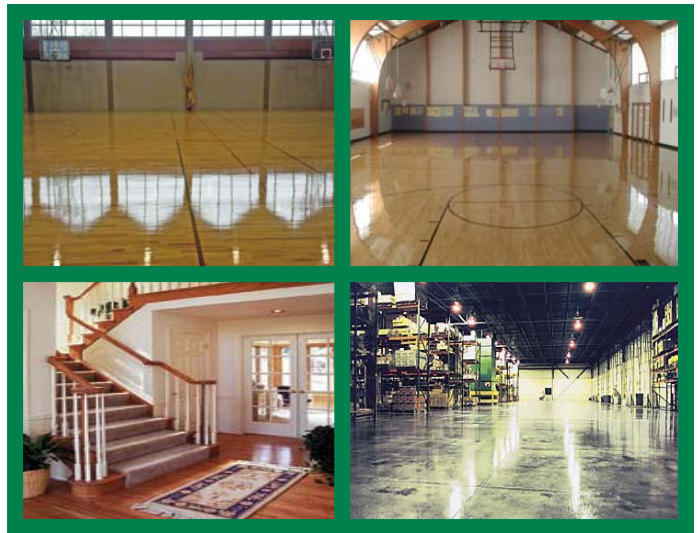

APPLICATION & MAINTENANCE

Wood Glow may be diluted from 2-4 ounces per gallon of water for cleaning light soil conditions and up to 12 ounces per gallon for heavy soil conditions. Wood Glow may also be used full strength for cleaning petroleum based oils, grease or food stains. NOTE: When used full strength Wood Glow may effect some water-based wood finishes so it should be tested in an inconspicuous area before use.

Wood Glow may also be used at 6- 8 ounces per gallon in an autoscrubber equipped with a 3M Scotch Brite Type A, maroon pad or with a mop & bucket and 175-300 Rpm buffing machine to prepare water-based urethanes for recoating. It may also be used with an automatic scrubber or mop and bucket as a tacking solution to clean floors after dry screening.

Wood Glow may be applied by spraying on and then wiping off with a clean cotton cloth, or diluted in a wringer bucket and used for damp mopping with a good quality, cotton or micro-fiber mop. Wood Glow evaporates completely so no rinsing is required.

SPECIFICATIONS

Active Ingredients	Propylene compounds, alcohol ethoxylates
pH	10.1 - 10.7
Free Ammonia	None
Free Alkali	0.5%
Free Acid	None
Phosphates	None
Abrasives	None
Color	Yellow
Odor	Light Citrus
Solubility in Water	100%
Freeze/Thaw Stability	3 cycles
Shelf Life	Min. 1 year (30°F.-125°F.)
Flash Point	Above 200° F.
Weight Per Gallon	8.3
Biodegradable	Yes
Soil Suspension	Excellent



SAFETY INFORMATION

Health	1
Flammability	0
Reactivity	0
Personal Protection	B

NOTE: This product contains an alkaline ingredient which may cause irritation in concentrated form. If ingested, give vinegar, juice of lemon, grapefruit, or orange freely. Get immediate medical attention. If contact with skin or eyes occurs, flush with water. If signs of irritation occur, seek medical attention. Contains less than 1% 2-Amino Ethanol CAS #141-43-5. Read MSD Sheet before using.



605 Springs Road, Bedford, MA 01730 USA
Tel: 978.667.5161, Fax: 978.670.5797
E-mail: Info@perma.com
www.perma.com

[Profile](#)[Alerts](#)[Billing](#)[Domains & Email](#)[Customer Dashboard](#)[Contacts](#)[Campaigns](#)[Email Templates](#)[Appointments & Reservations](#)[Form Responses](#)[Web Site Dashboard](#)[Page List](#)[Add New Page](#)[View Live Site](#)[Designs](#)[Tools](#)[eCommerce](#)[Statistics](#)

- o [Design Center](#)
- o [SEO Packages](#)

[Web Site](#) » [Page List](#) » woodglow (Wood Glow)

Manage Pages

Edit Page Properties

Add to Page ▾

- o Form
- o Image
- o Video
- o Photo Gallery
- o Widget

- Save
- Preview
- Publish
- Live

Select a page to edit:

Page: 10 of 10



Tops



Traction Clean



Tradition



Tuff Gloss



Uncover



Warranty



Waterless Cleaner



Wood Care 101



Wood Floor Coatings



Wood Glow



Zip Strip





APPLICATION INFORMATION

**High Gloss, Solvent-Base,
Maintenance System For
Gymnasium and Other Wood
Floors:**



[Center Court - 50% Polyurethane
wood Finish](#)



[Coast-To-Coast - 350 VOC Compliant
Wood Floor Coating](#)



**Water-Based, High Gloss,
Maintenance System For Synthetic
Sports/Rubber Floors and Wood
Floor Finishes:**



[Syn-Coat - Synthetic Sports Floor
Finish](#)



[Hydrothane II - Two Part Water-Based
Urethane](#)
























































































































































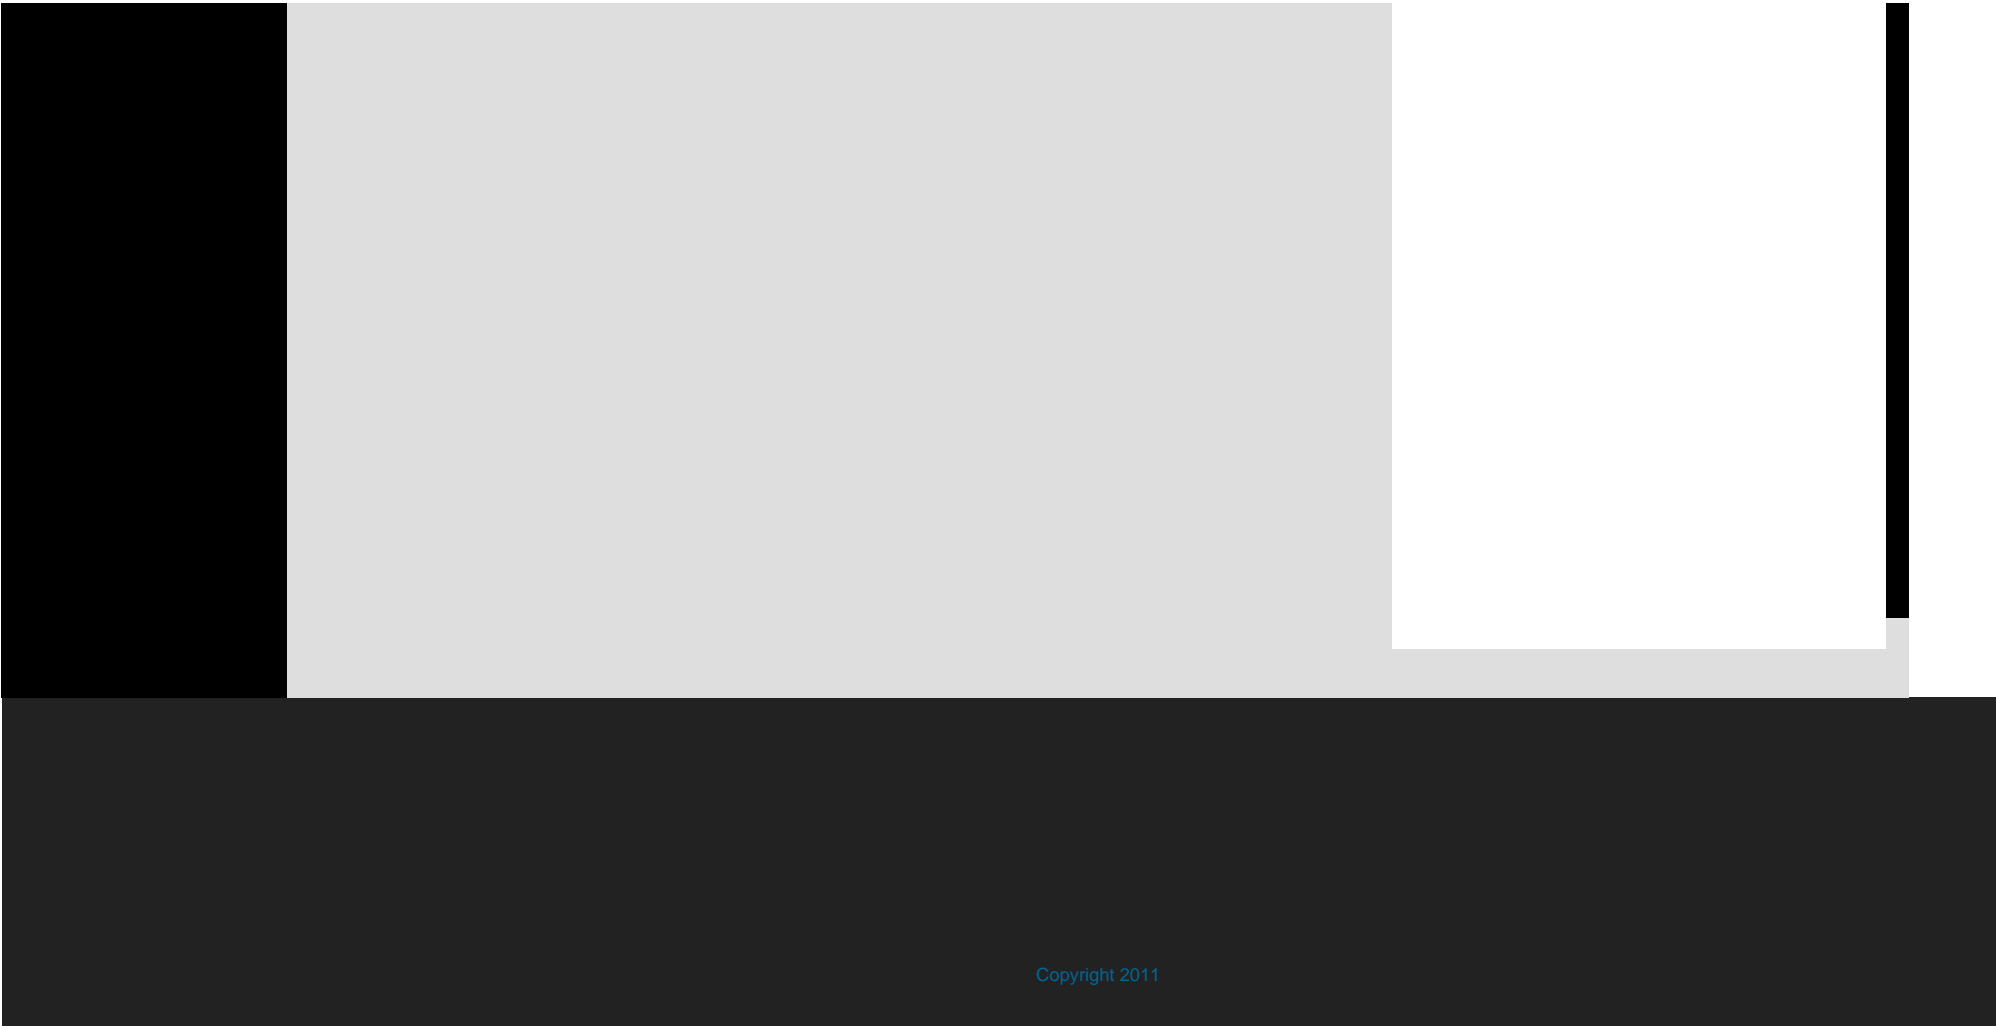

Copyright 2011