


STAT-SEAL 2

Anti-Static Sealer For Standard And Conductive Vinyl Tile And Finished Concrete Floors

Stat-Seal is a state-of-the-art sealer/finish with inherent static dissipating properties specifically formulated for application in areas where positive elimination of static electricity is required. It is designed for use on standard or conductive vinyl tile surfaces as a base coat for *Stat-Coat*, or alone, as a combination sealer/finish for hard surfaces such as coated or bare concrete. *Stat-Seal's* unique static dissipating ingredient is actively linked to the chemical structure of the polymer system, which controls for washout or leaching of the static dissipating properties. Easy maintenance, good gloss, and exceptional durability are additional assets of this high-tech, anti-static sealer/finish.

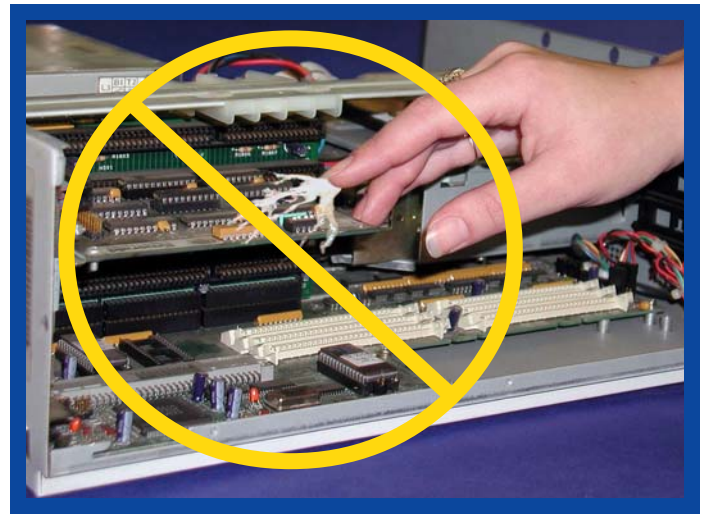

APPLICATION & MAINTENANCE

NOTE: All previous versions of Stat-Seal or other Anti-Static Finishes or Sealers must be removed with Eliminator Finish Stripper prior to the application of Stat Seal 2.

Floor surfaces should be 60° F or warmer and in relative humidity conditions between 40-60%. Remove old finish or sealer with Eliminator. Follow directions on stripper label for application. To obtain static dissipative properties on concrete or other non-static dissipative surfaces, a minimum of three to five coats are required. Two coats of Stat Seal 2 are recommended when used as a sealer for static dissipative or conductive tiles. Apply thin even coats, allowing 1 to 2 hours between coats depending on humidity conditions. No more than 3 coats should be applied in a 24-hour period.

Recoating of existing finish: Sweep the floor to remove any loose dirt or dust. Wash the floor with Stat-Clean to remove dirt and soil. Apply thin even coats, allowing 1 to 2 hours between coats depending on humidity conditions. The frequency of refinishing will vary depending on the efficacy of the maintenance program and environmental conditions.

Routine maintenance: Floor surfaces should be swept with an untreated mop daily. Stat-Seal should be damp mopped **only** with Stat-Clean regularly, to remove soil, salt, and film deposits which can degrade the coatings static dissipative properties and gloss.

For optimum results do not apply during excessively humid conditions (>60% RH) and do not dry buff or dry burnish.

SPECIFICATIONS

Nonvolatile Solids	22 ± 0.6%
Total Active	25%
Resistivity-ASTM D257 Max/Cm ² @	<10 ⁸ Ohms ²
	40% Relative Humidity
Static Dissipation	0.02 Second
pH	7.4-8.0
Gloss 60°	80+ @ 3 Coats
Color	Blue Green
Weight Per Gallon	8.4-8.6
Slip Resistance (ASTM F-609)	0.55 minimum
Stability	1 year minimum at room temperature
Freeze/Thaw Stability	3 cycles minimum
Drying Time	1-2 Hours
Water Resistance	Good
Gallon Coverage (Feet ²)	1500 - 2000 ft ²
Removability (Gardner)	75 cycles maximum
VOC Content	54 grams/liter

SAFETY INFORMATION

Health	1
Flammability	0
Reactivity	0
Personal Protection	B

This material is not a hazardous mixture as defined in 29 CFR 1919, 1200 and M.G.L. c. 111F. Safety glasses and gloves should be worn during application and handling. If ingested, drink milk, water, or fruit juice and induce vomiting with oil of ipecac. In the event of eye contact, flush area with water for 15 minutes. **Contact a Physician.** For detailed information, consult MSDS sheet.



605 Springs Road, Bedford, MA 01730 USA
Tel: 978.667.5161, Fax: 978.670.5797
E-mail: Info@perma.com
www.perma.com