


BALANCE

Anti-Slip, Durability and Gloss Enhancing Floor Finish Burnishing Treatment

This revolutionary product increases the durability of vinyl composition tile finishes, while at the same time increasing gloss and slip resistance. Any of Perma's high quality Floor finishes that are treated with Balance exhibit a truly brilliant gloss, slip resistance characteristics that exceed OSHA, Americans with Disabilities Act (ADA) and National Floor Safety Institute (NFSI) recommendations and can experience a 30-50% increase in finish longevity.

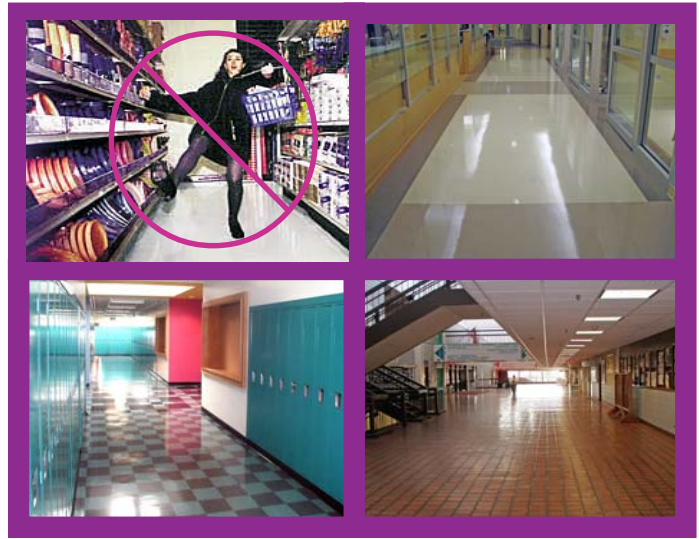

APPLICATION & MAINTENANCE

1. Sweep or dry mop floor to remove any dirt or soil.
2. To obtain optimum results, heavily soiled floors should be cleaned with Super Blue, all purpose cleaner, prior to applying Balance.
3. Apply Balance (undiluted) in a very thin coat. Applying too much Balance will make burnishing more difficult and waste product. One gallon of Balance will cover 4000-5000 square feet of flooring.
4. Allow floor to dry.
(Note: Floor may appear hazy at this time)
5. Burnish Balance using a 1000 RPM or faster burnishing machine with a Balance Applicator pad, passing over the finish three times for maximum results.

Maintenance of Balance

Once the floor has its initial treatment of Balance, floors should be kept clean by washing daily with Stand Up. Burnish the floor with the Balance Maintainer pad at least weekly. When your floors don't *POP*, simply reapply Balance to the worn area and burnish.

SPECIFICATIONS

Nonvolatile Solids	Modified Acrylic
Total Active	10%
pH	9.0-9.8
Gloss 60° Buffed	90+
Color	Translucent
Weight Per Gallon	8.31
Slip Resistance (ASTM F-609)	>.6 SCOF
Stability	1 year minimum at room temperature
Freeze/Thaw Stability	3 cycles minimum
Drying Time	15 - 20 minutes
Water Resistance	Excellent
Gallon Coverage (Feet ²)	4000 - 5000
Removability (Gardner)	75 cycles maximum

SAFETY INFORMATION

Health	1
Flammability	0
Reactivity	0
Personal Protection	B

Balance is not a hazardous mixture as defined in 29 CFR 1910.1200 and M.G.L. c. 111f. Safety Glasses and Gloves should be worn during application. CAUTION: Contains Glycol Ethers. Can cause eye irritation. Prolonged exposure may cause skin irritation. FIRST AID: In case of contact, flush with plenty of water. If swallowed, get immediate medical attention. Consult Material Safety Data Sheet before using.



605 Springs Road, Bedford, MA 01730 USA
Tel: 978.667.5161, Fax: 978.670.5797
E-mail: Info@perma.com
www.perma.com