


STAT BUFF 2

Anti-Static Spray Buff/Gloss Maintainer For Stat Coat Floor Finish

This innovative spray buff is formulated as a companion product for Stat-Coat 2. An integral component of a conductive maintenance program, Stat-Buff 2 is designed to extend the static dissipating qualities of Stat-Coat 2 as well as restore the gloss and enhance the appearance of conductive flooring surfaces. Its inherent static dissipating properties make Stat-Buff 2 ideal for application in computer rooms, electronic assembly areas, telephone substations, and any other area where positive elimination of static electricity is a prime consideration. Incorporation of Stat-Buff 2 into a anti-static flooring maintenance program will extend the period of time between stripping and recoating procedures, saving labor and money.

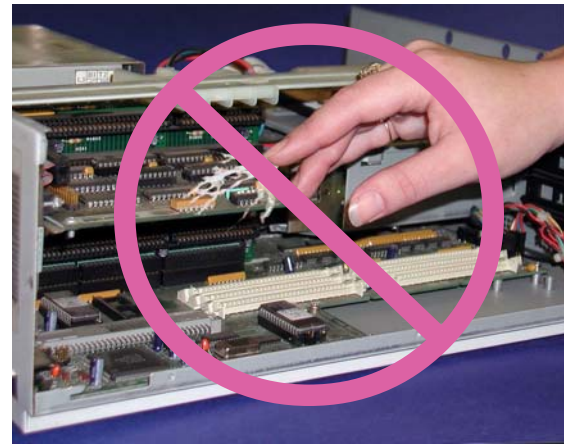

APPLICATION & MAINTENANCE

Note: Stat Buff 2 is not compatible with Stat Buff or other static dissipative maintenance products.

Remove loose dirt and soil by sweeping or vacuuming. For best results, the area to be buffed should be damp mopped with Stat-Clean. Using a soft or medium pad, spray Stat-Buff 2 ahead of the buffing machine, working small areas at a time.

Stat-Buff 2 may also be diluted 32 ounces per gallon of water (1:4) for use as a mop on restorer. Dilute the Stat-Buff 2 in a mop bucket with cold water. Damp mop the area using a lint free cotton or combination cotton and synthetic mop. Allow the floor to dry thoroughly then burnish with a soft pad. Wash and rinse buffing pads after each application.

For optimum results, do not apply under high humidity conditions.

SPECIFICATIONS

Nonvolatile Solids	10± 0.5%
Total Active	12%
Resistivity-ASTMD257	<10 ⁸ Ohms ² Max./Cm ² @ 40% Relative Humidity
pH	8.0 - 8.8
Gloss 60° - Buffed	85
Color	Blue Green
Weight Per Gallon	8.4 - 8.6
Slip Resistance (ASTM)	0.52 minimum
Stability	1 year minimum at room temperature
Freeze/Thaw Stability	3 cycles
Drying Time	30 minutes
Water Resistance	Good
Gallon Coverage (Feet ²)	2000 - 3500 ft ²

SAFETY INFORMATION

Health	1
Flammability	0
Reactivity	0
Personal Protection	B

This material is not a hazardous mixture as defined in 29 CFR 1919, 1200 and M.G.L. c. 111F. Safety glasses and gloves should be worn during application and handling. If ingested, drink one or two cups milk or water. In the event of eye contact, flush area with water for 15 minutes. **Contact a Physician.** For detailed information, consult MSDS sheet.



605 Springs Road, Bedford, MA 01730
Tel: 978.667.5161, Fax: 978.670.5797
E-mail: Info@perma.com
www.perma.com